

Idle Timer for 25R-C

Version: 20180317

Download the firmware upgrade package from:

a) <https://www.glotrends-store.com/downloads/>

b) https://drive.google.com/open?id=1h1ako0GOMGqcUc7Mn_yF8yr-5C-7uQfb

1) USB Cable connect with PC

25R-C power on

Note: No need to load the hard drive during firmware upgrade.




2) Unzip the file;

See 3 files




170505_B5_27_82.bin
as_mp_Tool v0.5.ini
ASM105xMPTool.exe

- Right click the ASM105xMPTool.exe
Run the exe with administrator

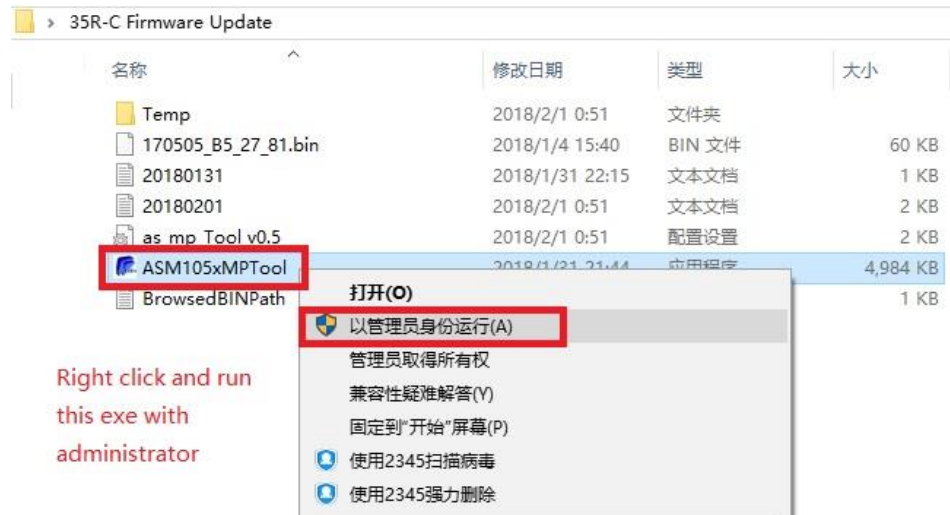

- As below picture, Step 1: click and input the password "asmedia";
Step 2: after input password, 25R-C information will appear automatically;
Step 3: Select the idle time
Step 4: Click and open the file "170505_B5_27_82.bin";
Step 5: Click and run the bin file;

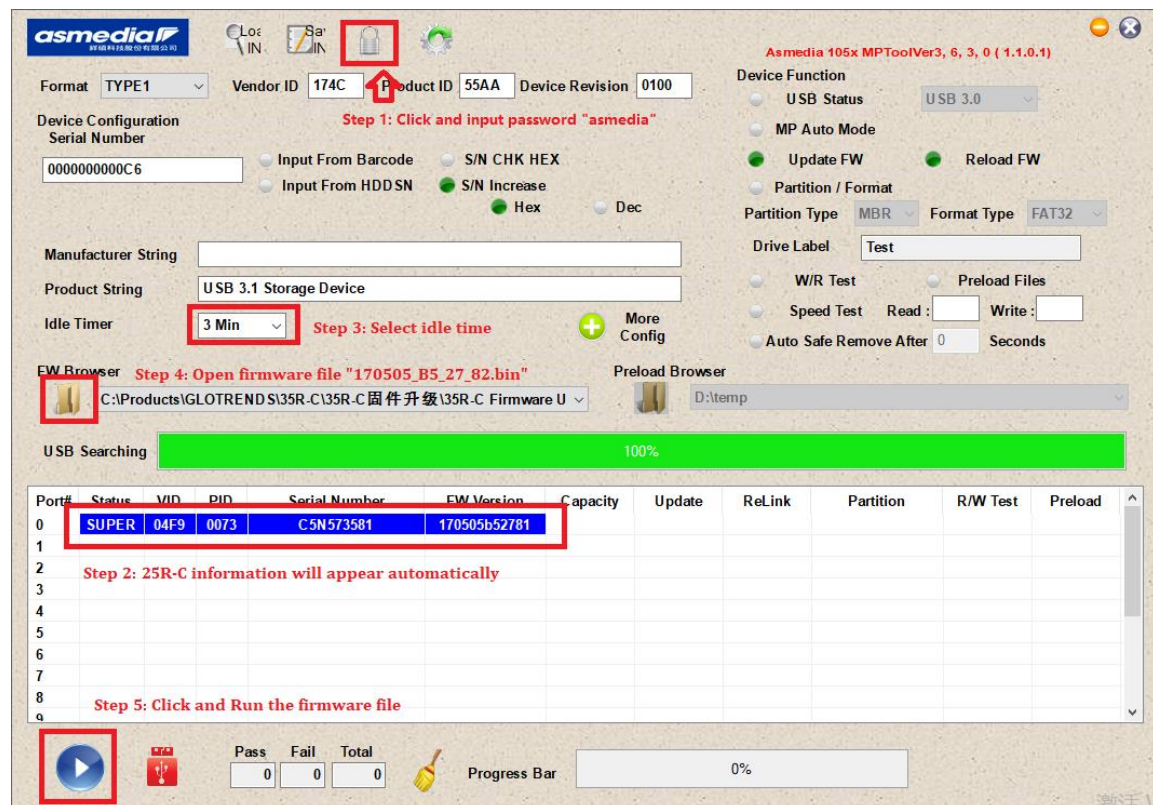

5) Step 6: "PASS" will appear if successfully;

Step 7: Exit the exe;

Step 8: Restart the 25R-C

Asmedia 105x MPToolVer3, 6, 3, 0 (1.1.0.1)

Format: TYPE1 Vendor ID: 174C Product ID: 55AA Device Revision: 0100

Device Configuration
Serial Number: 0000000000C7
Input From Barcode: S/N CHK HEX:
Input From HDDSN: S/N Increase: Hex: Dec:

Manufacturer String:
Product String: USB 3.1 Storage Device
Idle Timer: 3 Min More Config:

FW Browser: C:\Products\GLOTTREND S135R-C135R-C 固件升级\135R-C Firmware U
Preload Browser: D:\temp

USB Searching: 100%

Port#	Status	VID	PID	Serial Number	FW Version	Capacity	Update	ReLink	Partition	R/W Test	Preload
0	SUPER	04F9	0073	C5N573581	170505b52781		PASS	PASS			
1											
2											
3											
4											
5											
6											
7											
8											
9											

Step 7: Exit the exe

Step 6: "PASS" will appear if successfully

Pass: 1 Fail: 0 Total: 1 Progress Bar: 100%

PASS