

K13A Firmware Upgrade Manual for ODD

Function_20180502

Download the firmware upgrade package from GLOTRENDS website:

<https://www.glotrends-store.com/downloads/>

If any problem, please contact email (sale@glotrends-store.com)

- 1) USB Cable connect with PC
K13A power on with USB port

Note: No need to load the hard drive during firmware upgrade.

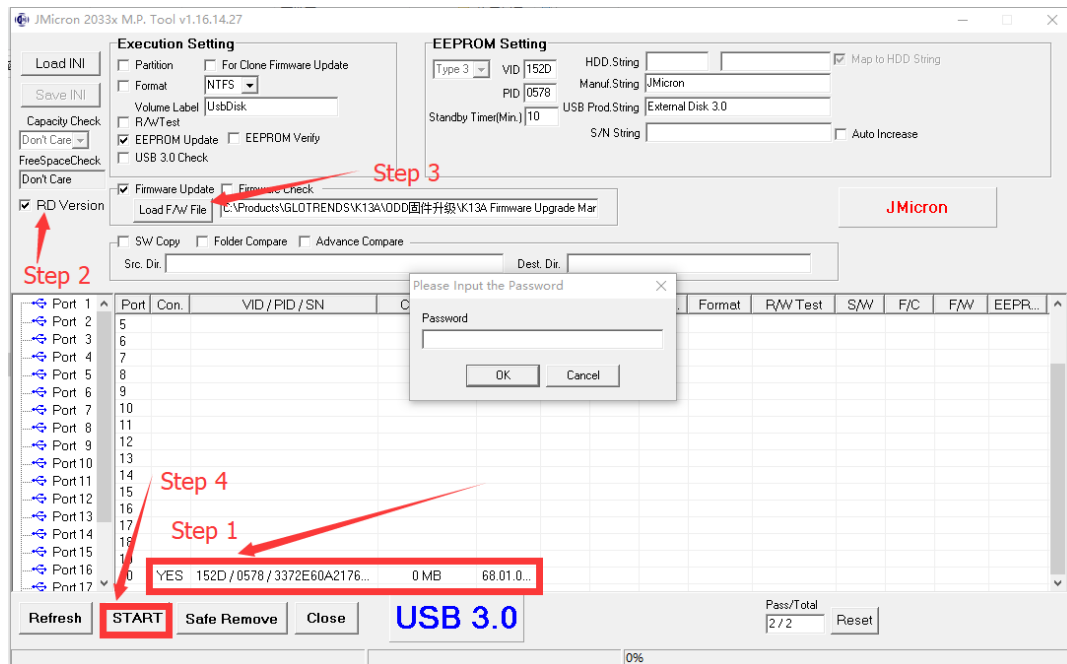


- 2) Unzip the file, see files as bellow:

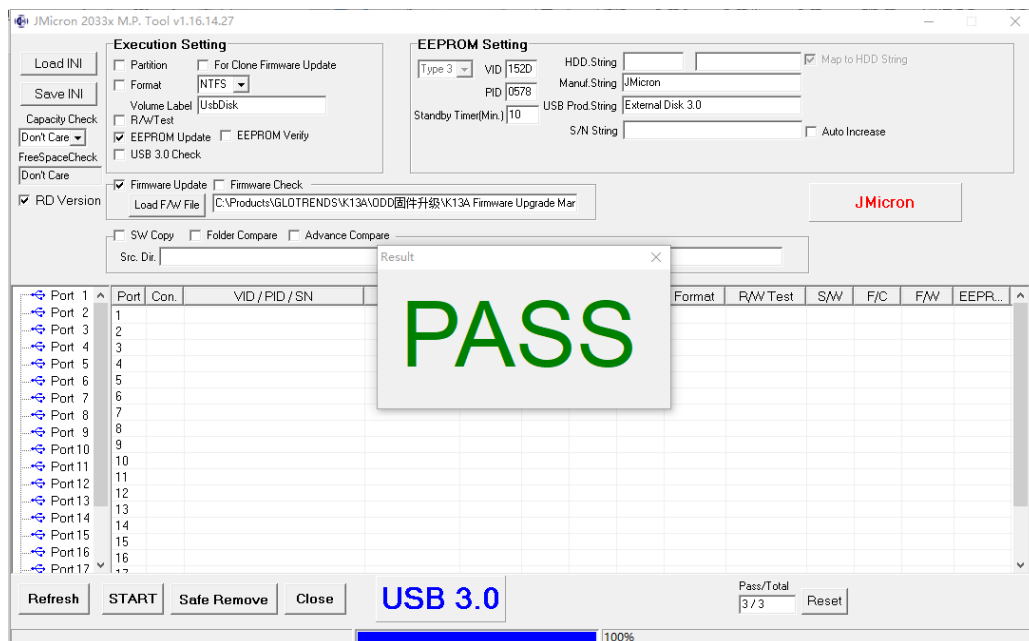

K13A Firmware
Upgrade
Manual for
ODD Function...

- log
- BIN-16005 JMS578_STD_v00.04.00.05_Bus Power + ODD-20170324.bin
- JMMassProd.ini
- JMMassProd2_v1_16_14_27.exe
- JMS578_Beihuan_v68.01.00.02.bin
- test.bin

- 3) Right click the JMMassProd2_v1_16_14_27.exe
Run the exe with administrator
- 4) As below picture, Step 1: Hardware information will be collected by software automatically;
Step 2: Click “RD Version” and input the password “jmicron”;
Step 3: Click “Load F/W File”, and open file “BIN-16005 JMS578_STD_v00.04.00.05_Bus Power + ODD-20170324.bin”
Step 4: Click “START” to run the firmware



- 5) Step 5: “PASS” will appear if successfully;
- Step 6: Close the exe;
- Step 8: Restart the K13A once, then K13A will support ODD(CD/DVD/Blu-Ray)



Notes:

- 1) Once upgrade to support ODD(CD/DVD/Blu-Ray) function, K13A compatibility may be affected, especially some small brands of hard drives will not recognize.
- 2) How to come back to previous firmware?
 - a) USB Cable connect with PC
 - b) K13A power on via USB or adapter
 - c) Need to access the drive or CD/DVD/Blu-Ray
 - d) Then do the firmware upgrade with firmware“JMS578_Beihuan_v68.01.00.02”

